

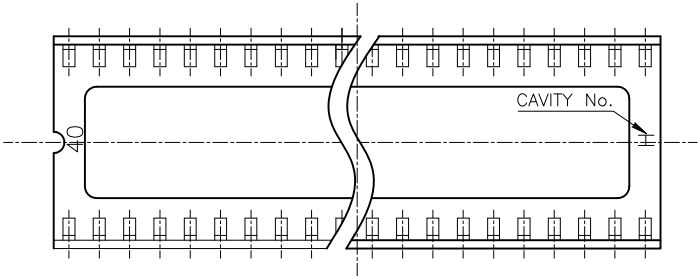



NOTES:

1. ELECTRICAL CHARACTERISTICS:
- 1.1 CONTACT RESISTANCE: 20mΩ Max.
 - 1.2 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - 1.3 INSULATION RESISTANCE: 1000MΩ Min.
2. ENVIRONMENT CHARACTERISTICS:
- 2.1 TEMPERATURE: -20°C~+105°C.

ORDER INFORMATION

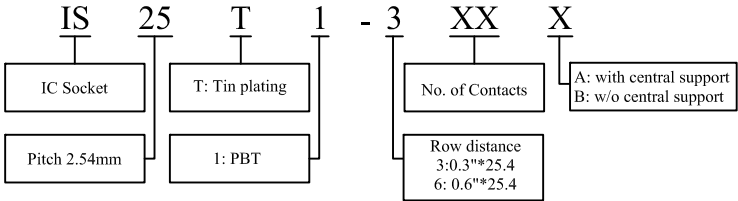

Position	Dimension			
	A	B	C	D
06	7.62	5.08	10.16	7.62
08	10.16	7.62	10.16	7.62
14	17.78	15.24	10.16	7.62
16	20.32	17.78	10.16	7.62
18	22.86	20.32	10.16	7.62
20	25.40	22.86	10.16	7.62
24	30.48	27.94	10.16	7.62
24	30.48	27.94	17.78	15.24
28	35.56	33.02	10.16	7.62
28	35.56	33.02	17.78	15.24
32	40.64	38.10	17.78	15.24
40	50.80	48.26	17.78	15.24
42	53.34	51.00	17.78	15.24

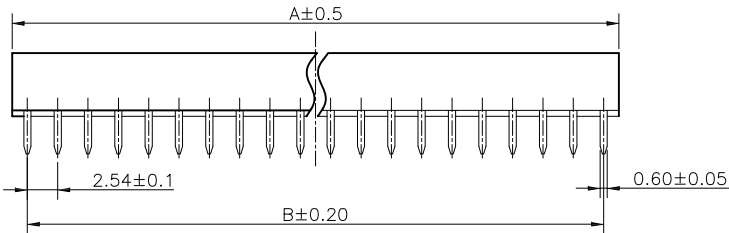

				PART NO.		IS25T1-XXXX		DRAWN		Andrew																	
				DRAWING NO.		IS25T1-XXXX		APPROVED		Brian																	
								DATE		2013/09/25																	
TITLE: IC Socket Pitch 2.54mm				REV. A0		TOLERANCE		.X ±0.25 .XX ±0.20		SCALE		NONE		UNIT		mm		NO.		REV.		REVISION				DATE	